




機密文件

NOTES:

1. MATERIAL: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING: UL94V-0
COLOR: IVORY
CONTACT: COPPER ALLOY
GROUND MOUNT EAR: COPPER ALLOY
2. PLATING:
CONTACT AREA: 10μ" GOLD
UNDER PLATING: NICKEL OVERALL
SOLDER TAIL AREA: TIN/LEAD
GROUND MOUNT EAR AREA: TIN/LEAD
3. SOLDER TAILS TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLANE, AND COPLANARITY OF SOLDER TAILS TO BE WITHIN 0.10
4. PART NO: CFH050-X7-X000


CONNECTOR TYPE:
2-TYPE 2 NORMAL WITH LOGO(PROCONN)
6-TYPE 2 NORMAL WITHOUT LOGO

TIN/LEAD PLATING:
0: GOLD FLASH
2: 10μ" GOLD
UNLEAD PLATING:
A: GOLD FLASH
C: 10μ" GOLD


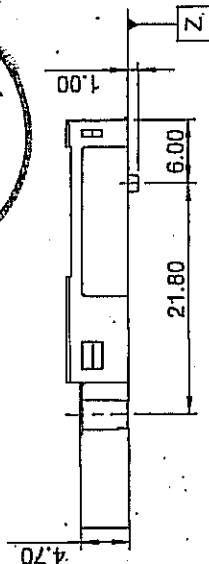

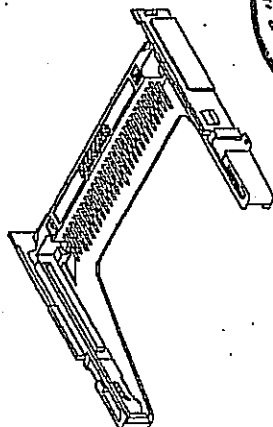


PROCONN
TECHNOLOGY CO., LTD.

DOC. CONTROL
PROCONN



PIN NUMBER	DIM. L±0.10
25, 26	3.50
ALL OTHER PINS	4.25
1, 13, 38, 50	5.00

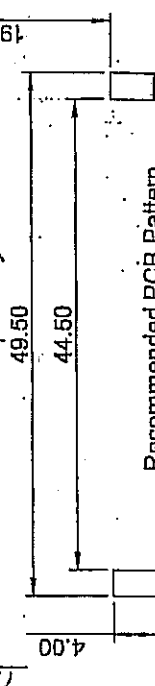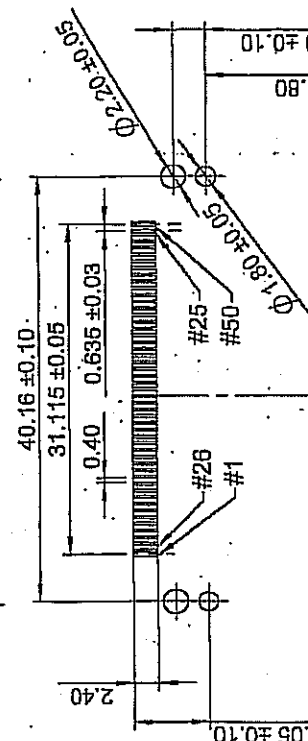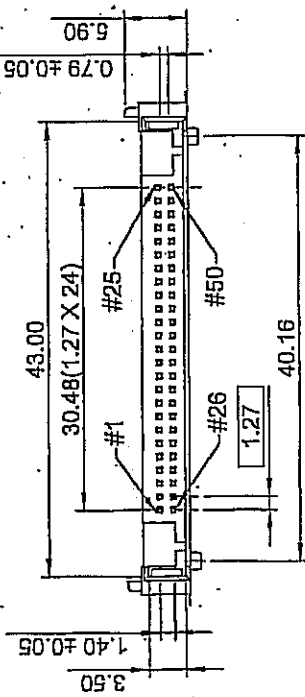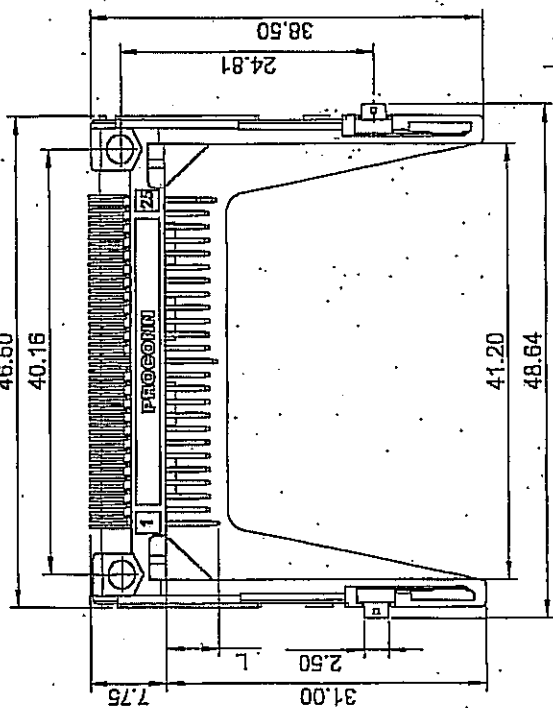

Recommended PCB Pattern

GENERAL TOLERANCE		Proconn Technology Co., Ltd.	
X±0.60	X'±5°	TITLE CF CARD TYPE II CONNECTOR STANDOFF 0mm(NORMAL KEY)	
X±0.30	X'±2°		
XX±0.20	XX'±1°		
XXX±0.10	XXX'±0.5°		
UNIT	mm	PART NO.	DWG NO.
		CFH050-27-X000	CFH050-04-I
APPROVAL	CHECKED	DRAWN	SCALE
Jane 9/2	Jane 5/3	Blue	3:2
			REV
			1

QP-04-04-B